


## Stainless Steel Strapping/Banding

### Product Description:

Insul-Global Stainless Steel Strapping / Banding meets ASTM A-240 standards. It is manufactured from T-304, 316/L Series Stainless Steel having 2B and BA finishes in a special soft annealed temper making it easy to handle.

### Application:

It is used for fastening of insulation jacketing on insulated pipes, vessels and equipment. Stainless Steel strapping / banding offers great strength and corrosion resistance.

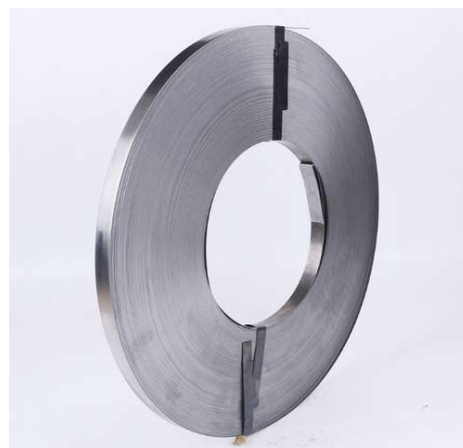

### Mechanical Properties

#### Stainless Steel Grade T-304, - ASTM A-240

Grade	Ultimate Tensile Strength (MPa) min	Yield Strength 0.2% Proof (MPa) min	Elongation (% on 50 mm) min	Rockwell B (HR B) max	Brinell (HB) max
304	540	230	45	92	201

### Availability:

Thickness MM	Width MM
0.4	13 (1/2")
0.4	19 (3/4")
0.5	13 (1/2")
0.5	19 (3/4")
0.5	25 (1")

\* Other sizes are available upon request

### Packing:

Packed in coils on pallets in shrink wrap.