

NUTS

Standard Hex Nut, Heavy Hex Nut, Hex Coupling Nut, Nylon Lock Nut, Spring Nut, Dome Nut and Wing Nut

Standards:-

- ASTM/ASME/BS/DIN/BS EN ISO /JIS

Material:-

- Mild Steel, Carbon Steel, Alloy Steel & Stainless Steel.



Size Range:-

- M6 to M64 in metric series
- ¼" to 2-½" in imperial
- Bigger sizes can be manufactured as per order.

Threads:-

- UNC, 8UN, UNF, Metric Coarse and Metric Fine


Typical Grades & Standards:-

- DIN 934 Class 4, 8, 10, 12, A270, A280, A470 and A480
- ASTM A194/A194M Grades 2H, 2HM, 4L, 7L and 7LM
- ASTM A563/563M Grades 8, 10S, A, B, C, D, DH, DH3

Ordering Information:-

- Dimensions - Size.
- Standard and Grade
- Finish (Black, GI, Yellow, HDG, Cadmium, Nickel, PTFE etc)

HEAVY HEX NUTS TO DIN 934 (H=D) Material ASTM A194 Grade 2H/2HM/4L, 7L, 7LM

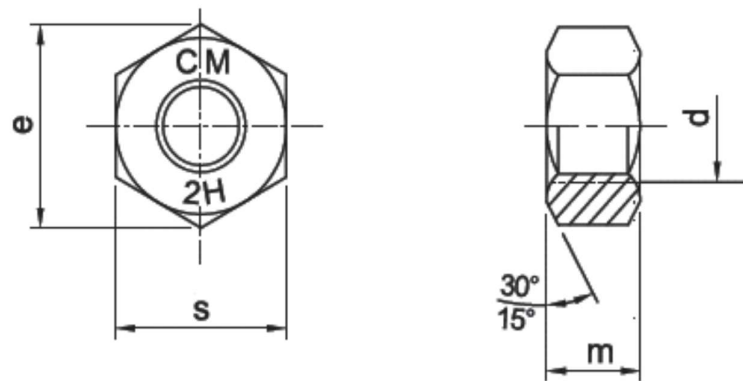

<u>A194 HEAVY HEX BOLTS</u>				
Dia.(D)	Thread Pitch	Across Flat AF	Thickness (m)	Weight KG/100
M8	1.25	13	8	0.65
M10	1.5	17	10	1.45
M12	1.75	19	12	2.17
M14	2	22	14	3.13
M16	2	24	16	4.16
M18	2.5	27	18	6.20
M20	2.5	30	20	8.05
M22	2.5	32	22	9.85
M24	3	36	24	13.80
M27	3	41	27	20.65
M30	3.5	46	30	27.90
M33	3.5	50	33	36.00
M36	4.0	55	36	49.15
M39	4.0	60	39	42.75
M42	4.5	65	42	81.50
M45	4.5	70	45	100.00
M48	5.0	75	48	122.00
M52	5.0	80	52	152.50
M56	5.5	85	56	177.50
M64	6.0	95	64	247.50
M72	6.0	105	72	334.50
M76	6.0	110	76	380.00